

Product datasheet

Specifications



TeSys D contactor - 3P(3 NO) - AC-3 - <= 440 V 115 A - 220 V AC 50/60 Hz coil

Local distributor code: 386021693 LC1D115M7

EAN Code : 3389110377170

Main

Range	TeSys
Range of product	TeSys D
Product or component type	Contacteur
Device short name	LC1D
Contacteur application	Motor control Resistive load
Utilisation category	AC-4 AC-1 AC-3
Poles description	3P
[Ue] rated operational voltage	Power circuit: <= 1000 V AC 25...400 Hz Power circuit: <= 300 V DC
[Ie] rated operational current	200 A (at <60 °C) at <= 440 V AC AC-1 for power circuit 115 A (at <60 °C) at <= 440 V AC AC-3 for power circuit

Complementary

Motor power kW	30 kW at 220...230 V AC 50/60 Hz (AC-3) 55 kW at 380...400 V AC 50/60 Hz (AC-3) 59 kW at 415...440 V AC 50/60 Hz (AC-3) 75 kW at 500 V AC 50/60 Hz (AC-3) 80 kW at 660...690 V AC 50/60 Hz (AC-3) 65 kW at 1000 V AC 50/60 Hz (AC-3) 18.5 kW at 400 V AC 50/60 Hz (AC-4)
Motor power hp	30 hp at 200/208 V AC 50/60 Hz for 3 phases motors 40 hp at 230/240 V AC 50/60 Hz for 3 phases motors 75 hp at 460/480 V AC 50/60 Hz for 3 phases motors 100 hp at 575/600 V AC 50/60 Hz for 3 phases motors
Pole contact composition	3 NO
Contact compatibility	M13
Protective cover	With
Auxiliary contacts type	type mechanically linked 1 NO + 1 NC conforming to IEC 60947-5-1 type mirror contact 1 NC conforming to IEC 60947-4-1
Auxiliary contact composition	1 NO + 1 NC
[Ui] rated insulation voltage	Power circuit: 600 V CSA certified Power circuit: 600 V UL certified Power circuit: 1000 V conforming to IEC 60947-4-1 Signalling circuit: 690 V conforming to IEC 60947-1 Signalling circuit: 600 V CSA certified Signalling circuit: 600 V UL certified
[Uimp] rated impulse withstand voltage	8 kV conforming to IEC 60947

Overvoltage category	III
[Ith] conventional free air thermal current	200 A (at 60 °C) for power circuit
Irms rated making capacity	1260 A at 440 V for power circuit conforming to IEC 60947 140 A AC for signalling circuit conforming to IEC 60947-5-1 250 A DC for signalling circuit conforming to IEC 60947-5-1
Rated breaking capacity	1100 A at 440 V for power circuit conforming to IEC 60947
Associated fuse rating	250 A gG at <= 690 V coordination type 1 for power circuit 200 A gG at <= 690 V coordination type 2 for power circuit 10 A gG for signalling circuit
Control circuit type	AC at 50/60 Hz
Coil technology	Built-in bidirectional peak limiting diode suppressor
Control circuit voltage limits	0.3...0.5 U _c (-40...70 °C):drop-out AC 50/60 Hz 0.8...1.15 U _c (-40...55 °C):operational AC 50/60 Hz 1...1.15 U _c (55...70 °C):operational AC 50/60 Hz
Average impedance	0.6 mOhm - Ith 200 A 50 Hz for power circuit
Power dissipation per pole	24 W AC-1 7.9 W AC-3
Minimum switching current	5 mA for signalling circuit
Minimum switching voltage	17 V for signalling circuit
Non-overlap time	1.5 ms on de-energisation between NC and NO contact 1.5 ms on energisation between NC and NO contact
Maximum operating rate	2400 cyc/h 60 °C
Inrush power in VA	280...350 VA 60 Hz cos phi 0.8 (at 20 °C) 280...350 VA 50 Hz cos phi 0.8 (at 20 °C)
Hold-in power consumption in VA	2...18 VA 60 Hz cos phi 0.3 (at 20 °C) 2...18 VA 50 Hz cos phi 0.3 (at 20 °C)
Insulation resistance	> 10 MOhm for signalling circuit
Tightening torque	Control circuit: 1.2 N.m - on screw clamp terminals - with screwdriver flat Ø 6 mm Control circuit: 1.2 N.m - on screw clamp terminals - with screwdriver Philips No 2 Power circuit: 12 N.m - on connector hexagonal screw head 4 mm Control circuit: 1.2 N.m - on screw clamp terminals - with screwdriver pozidriv No 2
Mounting support	Rail Plate
Electrical durability	0.8 Mcycles 200 A AC-1 at U _e <= 440 V 0.95 Mcycles 115 A AC-3 at U _e <= 440 V
Mechanical durability	8 Mcycles
Safety reliability level	B10d = 1369863 cycles contactor with nominal load conforming to EN/ISO 13849-1 B10d = 20000000 cycles contactor with mechanical load conforming to EN/ISO 13849-1
Operating altitude	0...3000 m
Compatibility code	LC1D
Product certifications	RINA CSA CCC BV LROS (Lloyds register of shipping) GL GOST DNV UL UKCA

Environment

Climatic withstand	conforming to IACS E10
Ambient air temperature for storage	-60...80 °C
Fire resistance	850 °C conforming to IEC 60695-2-1
Mechanical robustness	Vibrations contactor open: 2 Gn, 5...300 Hz Vibrations contactor closed: 4 Gn, 5...300 Hz

Shocks contactor closed: 15 Gn for 11 ms
Shocks contactor open: 6 Gn for 11 ms

Height	158 mm
Width	120 mm
Depth	136 mm
Net weight	2.5 kg

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	2.469 kg
Package 1 Height	19.0 cm
Package 1 width	17.5 cm
Package 1 Length	21.5 cm
Unit Type of Package 2	P06
Number of Units in Package 2	27
Package 2 Weight	79.663 kg
Package 2 Height	73.5 cm
Package 2 width	80.0 cm
Package 2 Length	60.0 cm
Package 3 Height	80 cm


Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
PVC free	Yes

Contractual warranty

Warranty	18 months
----------	-----------

Dimensions

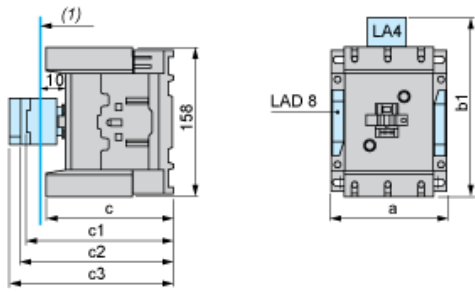

(1) Minimum electrical clearance

LC1		D115 and D150 (3-pole)
a		120
b1	with LA4 DA2	174
	with LA4 DF, DT	185
	with LA4 DM, DL	188
	with LA4 DW	188
c	without cover or add-on blocks	132
	with cover, without add-on blocks	136
c1	with LAD N or C (2 or 4 contacts)	150
c2	with LA6 DK20	155
c3	with LAD T, R, S	168
	with LAD T, R, S and sealing cover	172

Wiring

